

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
6 October 2005 (06.10.2005)

PCT

(10) International Publication Number  
**WO 2005/093899 A1**

(51) International Patent Classification<sup>7</sup>: **H01Q 1/24**,  
9/04, 5/00, 1/40

(74) Agents: **RÖGGLA, Harald** et al.; Philips Intellectual  
Property & Standards, Triester Strasse 64, A-1101 Vienna  
(AT).

(21) International Application Number:  
PCT/IB2005/050788

(81) Designated States (*unless otherwise indicated, for every  
kind of national protection available*): AE, AG, AL, AM,  
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,  
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,  
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,  
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,  
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,  
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ,  
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA,  
ZM, ZW.

(22) International Filing Date: 3 March 2005 (03.03.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
04101236.0 25 March 2004 (25.03.2004) EP

(84) Designated States (*unless otherwise indicated, for every  
kind of regional protection available*): ARIPO (BW, GH,  
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,  
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),  
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,  
FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO,  
SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN,  
GQ, GW, ML, MR, NE, SN, TD, TG).


(71) Applicant (*for all designated States except US*): **KONIN-  
KLIJKE PHILIPS ELECTRONICS N.V.** [NL/NL];  
Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).

(72) Inventor; and

(75) Inventor/Applicant (*for US only*): **PELZER, Heiko**  
[DE/DE]; Triester Strasse 64, A-1101 Vienna (AT).

[Continued on next page]

(54) Title: ANTENNA CONFIGURATION

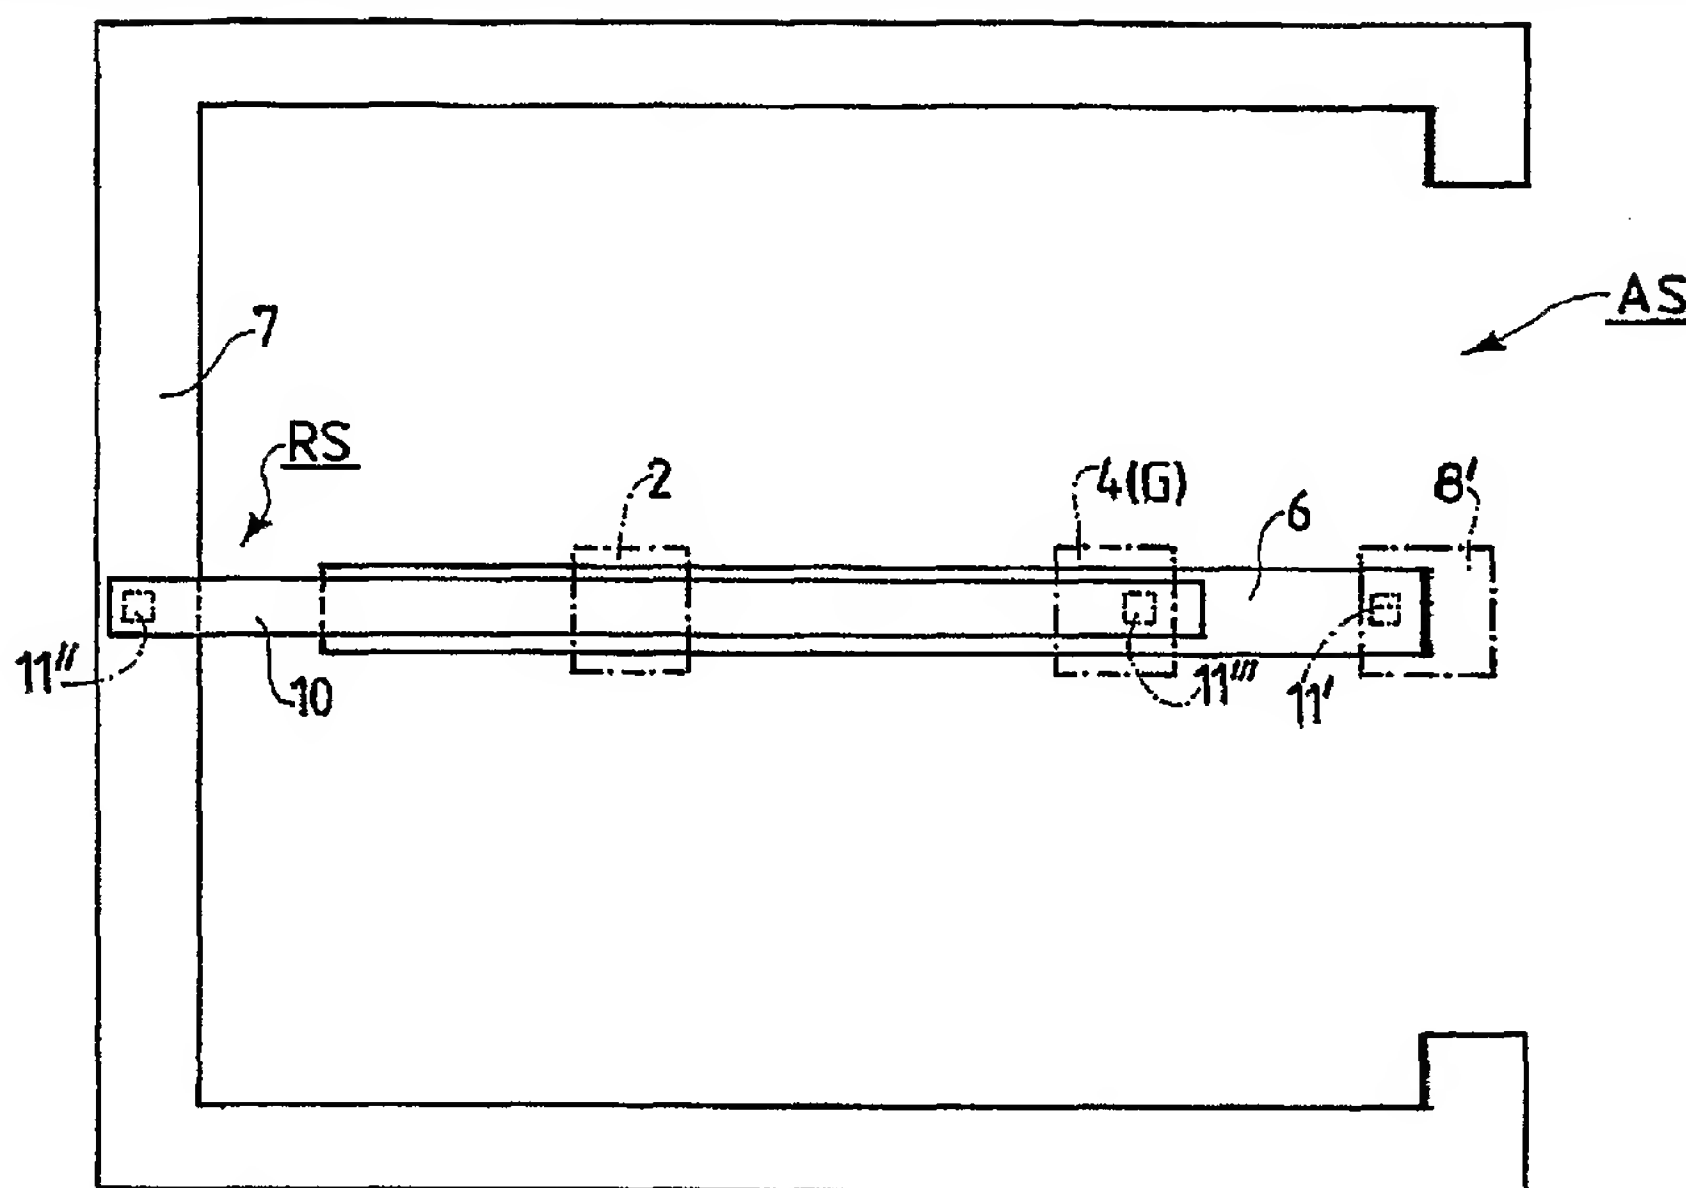

(57) Abstract: Regarding an antenna configuration (1) preferably provided for a telecommunication device and comprising a first resonator structure (6) and second resonator structure (RS) being capacitive coupled with the first resonator structure (6) it is suggested to provide the antenna configuration (1) with a control electrode (2) and a switching stage (3), said control electrode (2) by means of the switching stage (3) being switchably connected to ground (G) and said switching stage (3) enabling to change capacitive coupling of the two resonator structures (6, RS) and thus to change the resonance frequency of the antenna configuration (1) and making possible to switch between a first frequency range and a second frequency range for enhancing the bandwidth and achieving improved matching of the antenna configuration (1).

WO 2005/093899 A1



**Published:**

— *with international search report*

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*